

REVISIONS				
ECR/DCR	REV.	DESCRIPTION	DATE	APPD
-	-	INITIAL RELEASE	1-12-09	-
-	1	REVISED TO MATCH REV 4	12/1/11	-

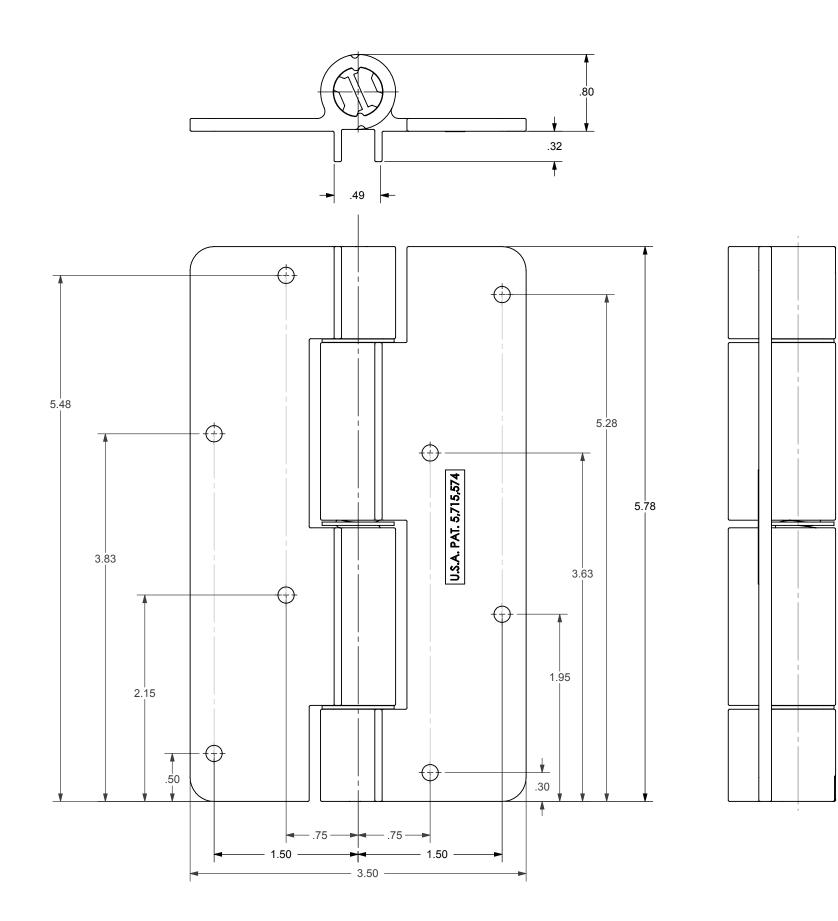

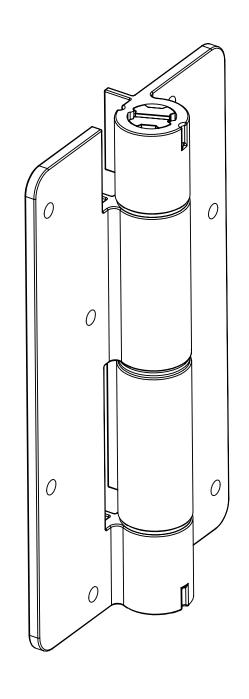

PACKAGING INSTRUCTIONS

- 1) POLYBAG (1) HINGE AND (1) FOLDED INSTRUCTION SHEET.
- 2) PACK (50) PER INNER CARTON.
- 3) PACK (2) INNER CARTONS IN (1) MAIN CARTON FOR A TOTAL OF (100) HINGES PER MAIN CARTON.

NOTES:

- 1. PART TO HAVE A NON-ABRASIVE FINISH.
 2. PART TO HAVE MIN. DRAFT ANGLE AS
 TOOLING REQUIRES.
 3. ANY AND ALL CHANGES TO MATERIAL OR
 FINISH MUST BE APPROVED BY NWI.
 4. ALL DIAMETERS TO BE CONCENTRIC
 WITHIN .005 UNLESS OTHERWISE
 SPECIFIED.
 5. ALL CORNERS TO BE .015 MAX R OR
 CHAMFER OR OTHERWISE NOTED.
 6. ALL DIMENSIONS ARE FINISHED PART
 DIMENSIONS.
 7. POWDERCOAT FINISH TO BE INTERPON
 DI010 OR NWI APPROVED EQUIVALENT.
 8. MATERIAL: LEAVES-ALUMINUM,
 SPRING-STEEL, WASHERS-PLASTIC,
 PINS-ZAMAK3

DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL±1/16" ANGULAR: MACH ±1 "BEND ±1" TWO PLACE DECIMAL ±0.01 THREE PLACE DECIMAL ±0.005

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NATIONWIDE INDUSTRIES. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NATIONWIDE INDUSTRIES IS PROHIBITED.



SELF-CLOSING ADJUSTABLE HINGE

В

SCALE:1:1 WEIGHT:

SHEET 1 OF 1